



OUSILONG

Square
Ceiling Series

017/

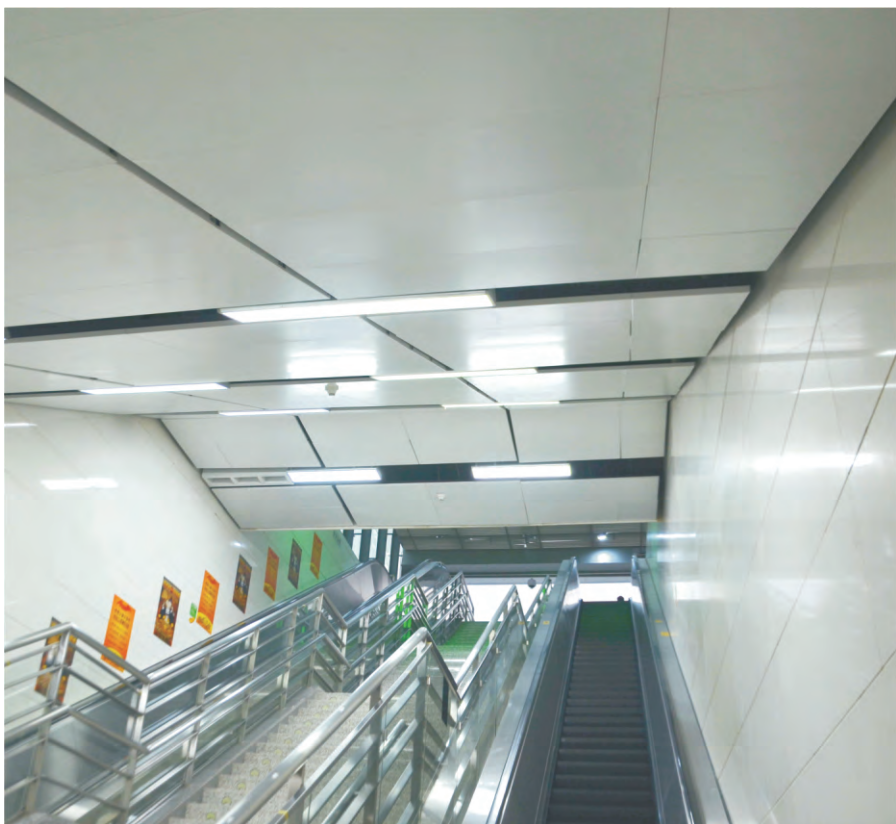


E-shaped Hook-on Ceiling




Perforated panel

No.:PE6012T
Materials:Grade AA aluminum alloy
Surface finish:Akzo Nobel Powder coating
Height:30mm
Specification:600mm x 1200mm
Standard thickness:1.0mm




Plain panel

No.:PE6012
Materials:Grade AA aluminum alloy
Surface finish:Akzo Nobel Powder coating
Height:30mm
Specification:600mm x 1200mm
Standard thickness:1.0mm




Hook-on carrier

No.:PEL01
Materials:Steel
Surface finish:Galvanization
Height:40mm
Length: 4000mm
Standard thickness:0.6mm




Hook-on hanger

No.:PEL01
Materials:Steel
Surface finish:Galvanization
Height:55/70mm
Standard thickness:1.0mm




Main runner

No.:PGG01
Materials:Steel
Surface finish:Galvanization
Height:38/50mm
Length: 3000mm
Standard thickness:0.6/0.8mm




Hook-on wind-proof fitting

No.:PEY01
Materials:Steel
Surface finish:Galvanization
Standard thickness:0.6mm



Main runner connector

No.:PGG01L
Materials:Steel
Surface finish:Galvanization
Height:35mm
Standard thickness:0.7mm




Main runner hanger

No.:PGG01J
Materials:Steel
Surface finish:Galvanization
Height:85mm
Standard thickness:1.0mm




M8 bar

No.:PGG01D
Materials:Steel
Surface finish:Galvanization



L25 wall angle

No.:PXL02T
Materials:Grade AA aluminum alloy
Surface finish:Akzo Nobel Powder coating
Specification:25mm x 25mm
Length:3000mm
Standard thickness:0.8mm




W25 wall angle

No.:PXW02T
Materials:Grade AA aluminum alloy
Surface finish:Akzo Nobel Powder coating
Specification:25mm x 25mm x 25mm
Length:3000mm
Standard thickness:0.8mm

Installation Diagram

- ① M8 Bar
- ② Main Runner Hanger
- ③ Main Runner
- ④ Flat Hook-on Ceiling
- ⑤ Hook-on Carrier Hanger
- ⑥ Hook-on Carrier

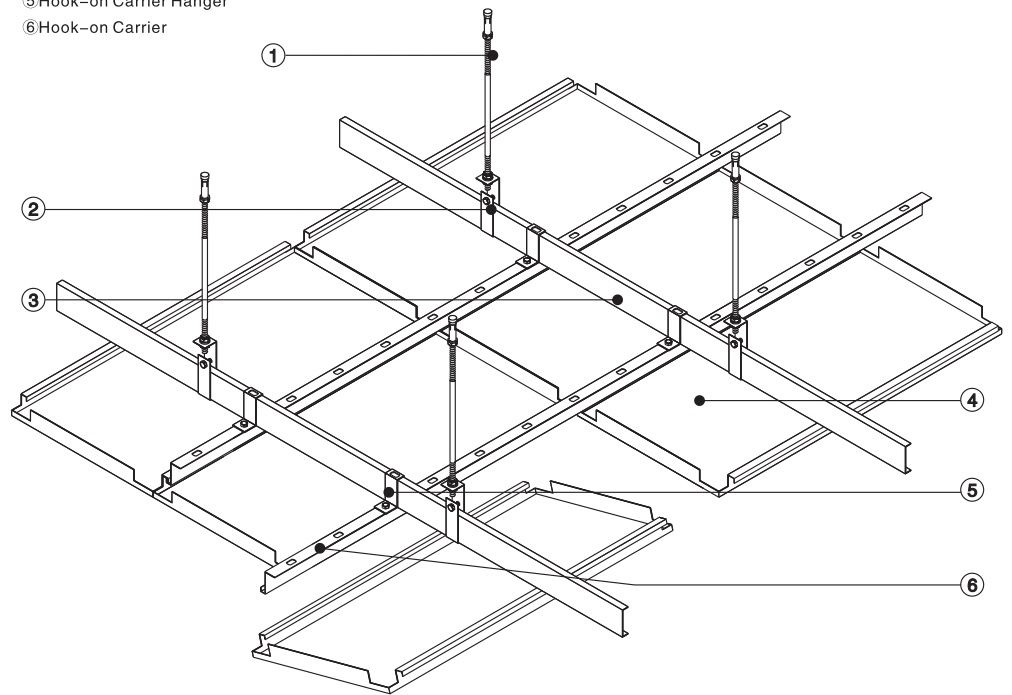

■ Standard Size: 300 x L, 600 x L, 800 x L, L ≤ 4500mm

